

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number
WO 2005/042872 A1

(51) International Patent Classification⁷: **E04D 13/18,**
F24J 2/04

(21) International Application Number:
PCT/SE2004/001564

(22) International Filing Date: 28 October 2004 (28.10.2004)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0302866-9 31 October 2003 (31.10.2003) SE

(71) Applicant and

(72) Inventor: OLSSON, Tord [SE/SE]; Boda Gård, S-184 91
Åkersberga (SE).

(74) Agent: ERIKSSON, Kjell; Norrtälje Patentbyrå AB, P.O.
Box 38, S-761 21 Norrtälje (SE).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: ROOF DESIGN

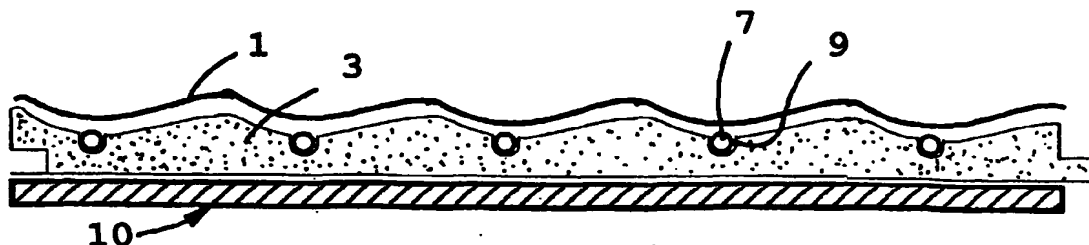

(57) Abstract: The present invention relates to a roof design that comprises an external sheet covering (1), an insulating layer (3) provided beneath the sheet covering (1) and a load carrying structure (10) that supports the insulating layer (3). It is significant of the roof design according to the present invention that means (7) for transporting an energy absorbing medium is provided in the insulating layer (3).

WO 2005/042872 A1